



House of Resistors
Since 1980

APR RESISTRONIC PRIVATE LIMITED

Manufacturer Of: Wire Wound Resistor - Ceramic Encased Resistor – Dynamic Breaking Resistor - Load Bank

APR – ALUMINIUM ENCASED POWER RESISTOR - AE



The 'APR' SA series is a range of high stability, Wire Wound Power Resistors. It can be used in almost all electronic circuitry as a current limiting resistor and thus finds application in many areas like defence equipment, process control instrumentation, telecommunication, power supplies, audio, video etc. A wide range of resistance values are available in this series of Resistors.

FEATURES:


- ✓ Super heat dissipation
- ✓ Excellent Electrical stability, reliability
- ✓ High Loading Capacity at low dimensions
- ✓ Custom terminations, Mounting arrangements possible

PERFORMANCE CHARACTERISTICS


Characteristics	Condition	Compliance
Tolerance	For Values less than 0.1Ω For Values greater than 0.1Ω	± 5% to ±10% ± 0.5% to ±10%
Temperature Co-efficient	Dry/Normal	0-200 ppm° (depending on wire selected)
Continuous Power	Rated power @25°C	<270°C temperature on surface
Short Term Overload	5 x Rated Power for 5sec	$R < \pm (2\% + 0.05\Omega)$
Solder ability (where applicable)	Solder bath at 250± 5% °C	95% coverage
Insulation Resistance	Dry/Normal	>10MΩ

ELECTRICAL CHARACTERISTICS

DERATING CURVE

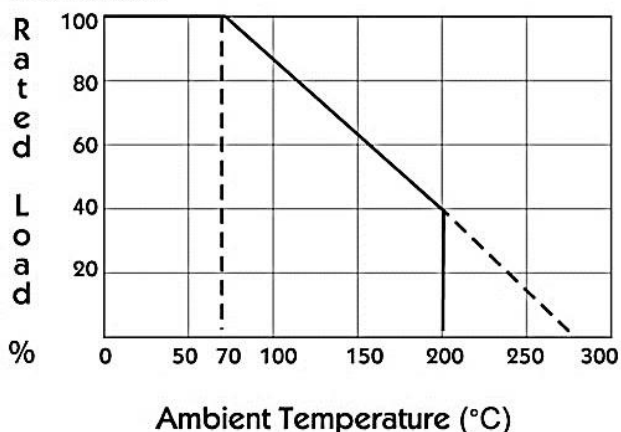


SURFACE TEMP CURVE AT 25°C

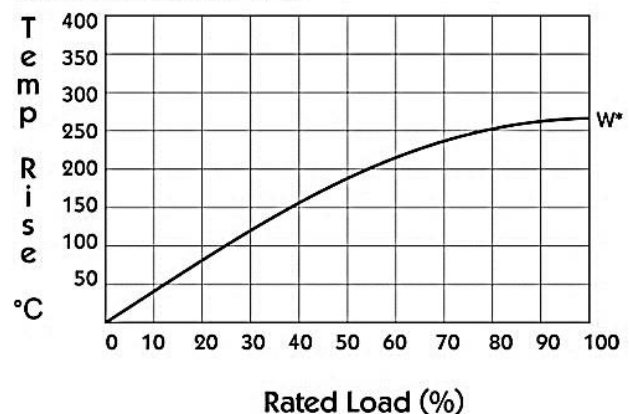

*The surface temp curve will be more or less the same for all wattages. Hence, average curve shown.

RESISTOR RANGE AND DIMENSIONAL DETAILS

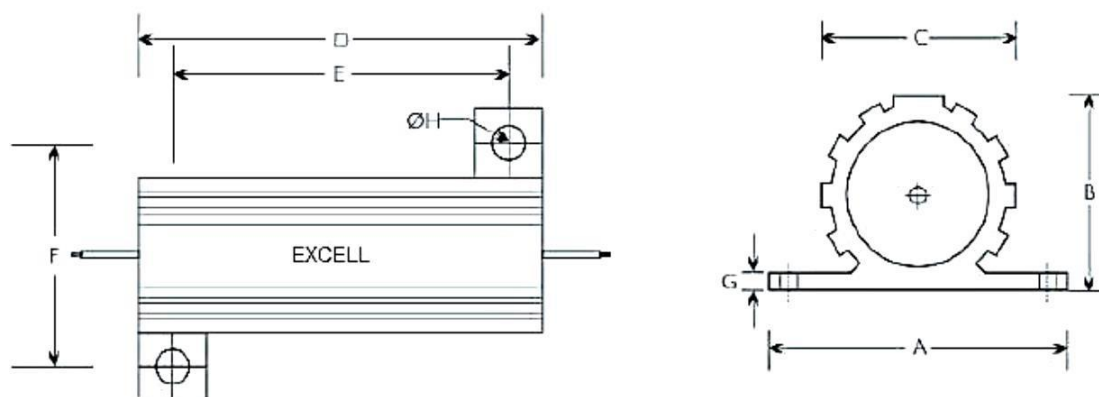

Series	Rated Power (W)	Resistance Range	A +/-1.5MM	B +/-1MM	C +/-1MM	D +/-2MM	E +/-1.5MM	F +/-1.5MM	G +/-0.5MM	H +/-0.5MM
AE10	3	0E01-8K	20.4	11	12.2	20.2	15	16	2	2
AE25	4	0E01-15K	28	15	15.3	27	18.4	21.5	2.1	3.5
AE50	5	0E01-25K	28	15	15.3	50	41.4	21.5	2.1	3.5
AE75	6	0E01-25K	47	25	26	49	39	37	3	5
AE100	10	0E01-30K	47	25	26	65	55	37	3	5
AE150	12	0E01-30K	47	25	26	98	88	37	3	5

Note:

1. Resistance value subject to availability of resistance wire
2. Dimension with tolerance of +/- 2 mm
3. Non-Inductive Resistor Available on request
4. Standard Tolerance is 5% (0.5% -10% Available on request)
5. Customized termination available.
6. Resistors of any other R value, Rating, Tolerance, Dimension and TC are available on request



APR Resistronic Private Limited

Manufacturer Of: Wire Wound Resistor - DBR - Load Bank – Ceramic Encased Resistor

Unit 1. 40, Datta Mhatre Compound, Near Pimpleshwar Temple, MIDC Ph II, Dombivali Dist Thane MH 421203

Unit 2. 102 Amar Industrial Estate, Near Shankheshwar Bldg, MIDC Ph II Dombivali Dist Thane MH 421204

Ph.:+91- 90-29505529/+91-96-23893583 Email: aprresistor@gmail.com Website: www.aprresistor.com



Website QR



WhatsApp QR